

Damper Sizes

6 to 24-inch diameters.

Damper Shell

24 gage, spiral wrapped, galvanized steel.

Blade

Dual, 26 gage, galvanized steel blades with neoprene sandwiched gasket.

Damper Actuator

Modulating or power open/close, 24VAC power.

LED Indicators

Red LED indicates fully closed, green LED indicates fully open.

Wiring

Use 18 gage, 3-conductor, thermostat wire.

Power

24VAC, 4VA .

Operating Temperatures

-20 to 175°F.

Features

Heavy duty, spiral wrapped damper shell.

Dual, formed blades with neoprene gasket sandwiched between blades for efficient airflow when open and low leakage when closed.


Bronze bushings for long life and quiet operation.

Shaft retaining clips for added strength.

250 in-oz of torque.

Modulating or open/close operation.

LED indicators for open and close position.

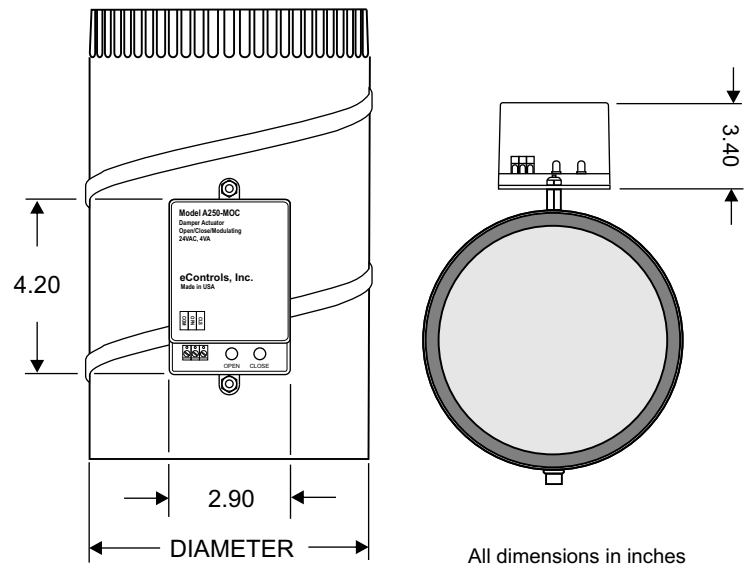

All dimensions in inches

SUBMITTAL FORM

Part Number	Diameter	Length	Quantity
CRDA250M-006	6-inch	10-inch	
CRDA250M-008	8-inch	10-inch	
CRDA250M-009	9-inch	10-inch	
CRDA250M-010	10-inch	12-inch	
CRDA250M-012	12-inch	14-inch	
CRDA250M-014	14-inch	16-inch	
CRDA250M-016	16-inch	18-inch	
CRDA250M-018	18-inch	20-inch	
CRDA250M-020	20-inch	22-inch	
CRDA250M-022	22-inch	24-inch	
CRDA250M-024	24-inch	26-inch	

Date: _____

Job: _____

Location: _____

Architect: _____

Engineer: _____

Contractor: _____

Buyer: _____

PO#: _____

eControls

eControls, Inc.
26072 Merit Circle #110 / Laguna Hills, CA 92653
949-916-0945 Fax 949-458-8502 www.iZoneUS.com