

**Zones**

Adds 3 zones.

**Compatible Panel**

Use with iWD3P panels. Zoning panel automatically detects the iWD3X Expansion Panels and adjusts the number of zones being used.

**Connection**

Connects to the iWD3P Zoning Panel or another iWD3X Expansion Panel using the 10-pin cable provided.

**Compatible Thermostats**

Gas/electric thermostats. 24VAC, battery powered or power sharing thermostats.

**Compatible Dampers**

24VAC power close/spring open, power open/spring closed, power open/close or modulating.

**Optional Sensors**

Discharge and outside air temperature sensors and duct pressure sensor.

**LED Display**

Displays zone call and damper status.

**Power**

20 to 30VAC, 10VA not including damper power requirements. Use 40-100VA, 24VAC, 60Hz Transformer, NEC Class 2.

**Operating Temperatures**

-20 to 175°F.



**Case Size**

9.70 x 7.65 x 1.63 inches.

**Features**

- All options and settings digitally set.
- Staging using thermostat or digitally set on-panel Timer.
- Limit staging using demand.
- Multi-color LEDs indicate status of zone thermostats, HVAC equipment, dampers and panel.
- Digitally configure and display all panel options and status.
- Select type of thermostat for each zone.
- Select either open/close or modulating dampers.

24-inch long cable. Connector plugs into iWD3P Zoning Panel or another iWD3X Expansion Panel.

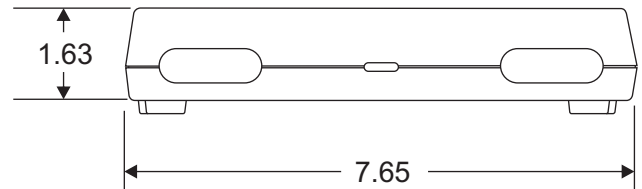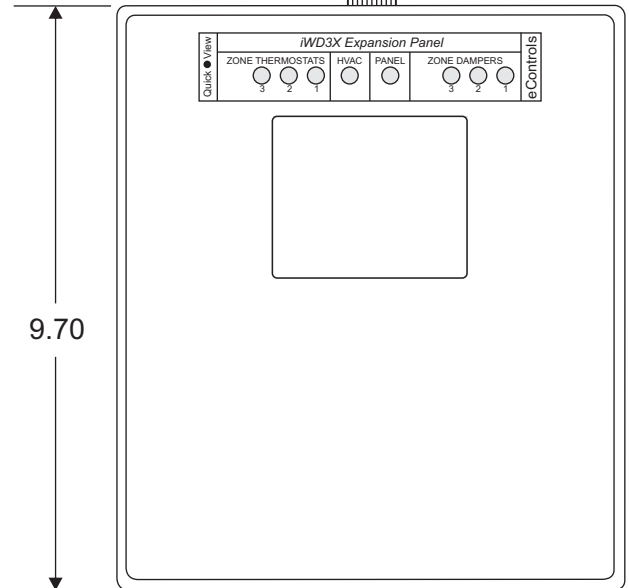

**SUBMITTAL FORM**

Model:	iWD3X
Quantity:	
Date:	
Job:	
Location:	
Architect:	
Engineer:	
Contractor:	
Buyer:	
PO#:	